

◆ **Model No:** ASDFD0003-3200

- 40mm Transducer Frame.
- 13.6 mm Voice Coil CCAW.
- 19 $\mu$ PET

◆ **Transducer front and side images:**



◆ **Specifications:**


**Features:**

Transducer	40CY-32.0Q
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 40mm PC
YOKE	Ø 16.3mm SPCC/CR3
Magnet	Ø 12.5mm NdFeB-N42
Washer (T-Plater)	Ø 12.8mm SPCC/CR3
PCB	Ø 14.3*0.4mm FR4
Diaphragm	Ø 37.85mm PET
Voice Coil	Ø 13.6mm CCAW
Grill Cover	NON
Mesh	Non-Woven White

**Transducers Properties:**

Transducer	Ø 40mm
D.C.R.	32 ± 15%Ω
Sensitivity	122.5 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) ≤ 3%
Rated Input Power	20mW
Max Input Power	30mW
Buzz and Rattles	Shall Be Rated Input Power 20mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

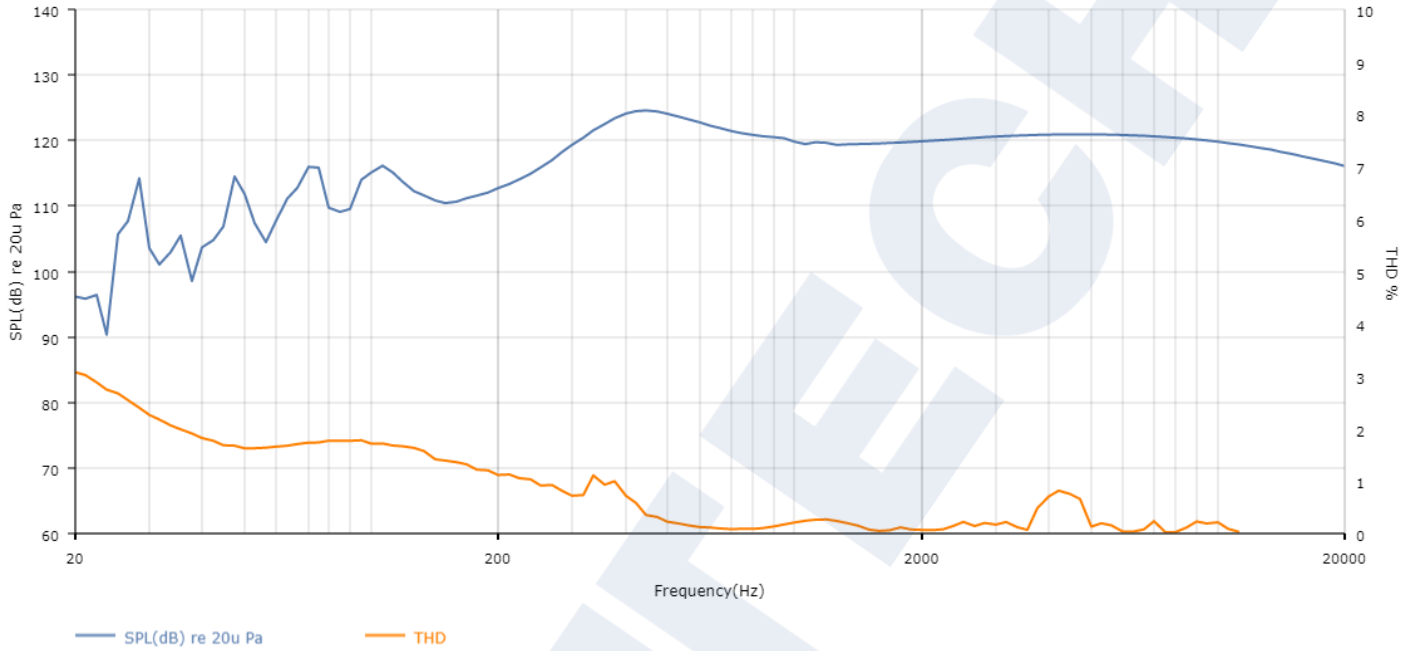

## ◆ Transducer front and side images:

