

● *Fullrange model: FSB512030-3814*

This 3inch 8ohm fullrange driver, with 0.8" voice coil copper clad aluminum wire, AL former, damping glue coated glass fiber cone and NBR rubber surround. It contains copper shorting cap on pole piece, which reduces coil inductance, thus providing both extended frequency response performance and reduce distortion. Whizzer cone in center can increase HF output. The TiL former, bottom plate and basket under spider are all vented hole so as to reduce air compression effects and aid cooling of the motor under high excursion conditions.

● *Transducer front and side images:*



● *Specifications:*

T-S Parameters

Resonance frequency [fs]	119 Hz
Mechanical Q factor [Qms]	2.62
Electrical Q factor [Qes]	1.06
Total Q factor [Qts]	0.75
Force factor [Bl]	4.12 Tm
Mechanical resistance [Rms]	0.98 kg/s
Moving mass [Mms]	3.42 g
Compliance [Cms]	0.52 mm/N
Effective diaph. diameter [D]	60 mm
Effective piston area [Sd]	28.27 cm ²
Equivalent volume [Vas]	0.59 l
Sensitivity (2.83V/1m)	83 dB
Ratio Bl/√Re	1.83 N/√W
Ratio fs/Qts	158.8 Hz

Electrical Data

Nominal impedance [Zn]	8 Ω
Minimum impedance [Zmin]	7.12 Ω
Maximum impedance [Zo]	23.22 Ω
DC resistance [Re]	6.96 Ω
Voice coil inductance [Le]	0.071 mH


Power Handling

100h RMS noise test (IEC 17.1)	20 W
Long-term max power (IEC 17.3)	- W

Voice Coil & Magnet Data

Voice coil diameter	20.3 mm
Voice coil height	8.1 mm
Voice coil layers	4
Height of gap	3.5 mm
Linear excursion	± 2.3 mm
Max mech. excursion	± - mm
Unit weight	0.433 kg

● Frequency Response / Impedance Curve:

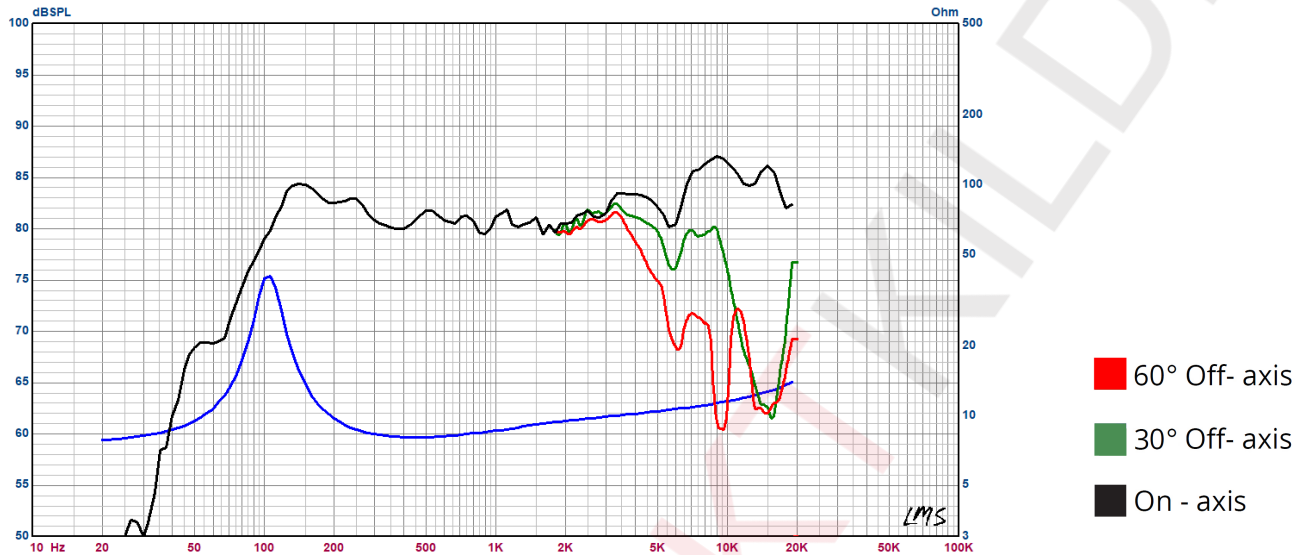

● Transducer front and side images:

