

◆ **Model No:** ASDFD0005-3200

- 50mm Transducer Frame.
- CCAW Voice Coil
- 19u PET+25u PEEK

◆ **Transducer front and side images:**



◆ **Specifications:**


Features:

Transducer	50CY
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 50mm PC
YOKE	Ø 31.7mm SPCC/CR3
Magnet	Ø 25.5mm NdFeB-N42
Washer (T-Plater)	Ø 27.3mm SPCC/CR3
PCB	Ø 48*0.3mm FR4
Diaphragm	Ø 47.95mm PEEK
Voice Coil	CCAW
Grill Cover	NON
Mesh	Non-Woven White

Transducers Properties:

Transducer	Ø 50mm
D.C.R.	32 ± 15%Ω
Sensitivity	116 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~10KHz) ≤ 2%
Rated Input Power	30mW
Max Input Power	50mW
Buzz and Rattles	Shall Be Rated Input Power 50mW Program Source Or Sine Wave

◆ S. P. L Curve:

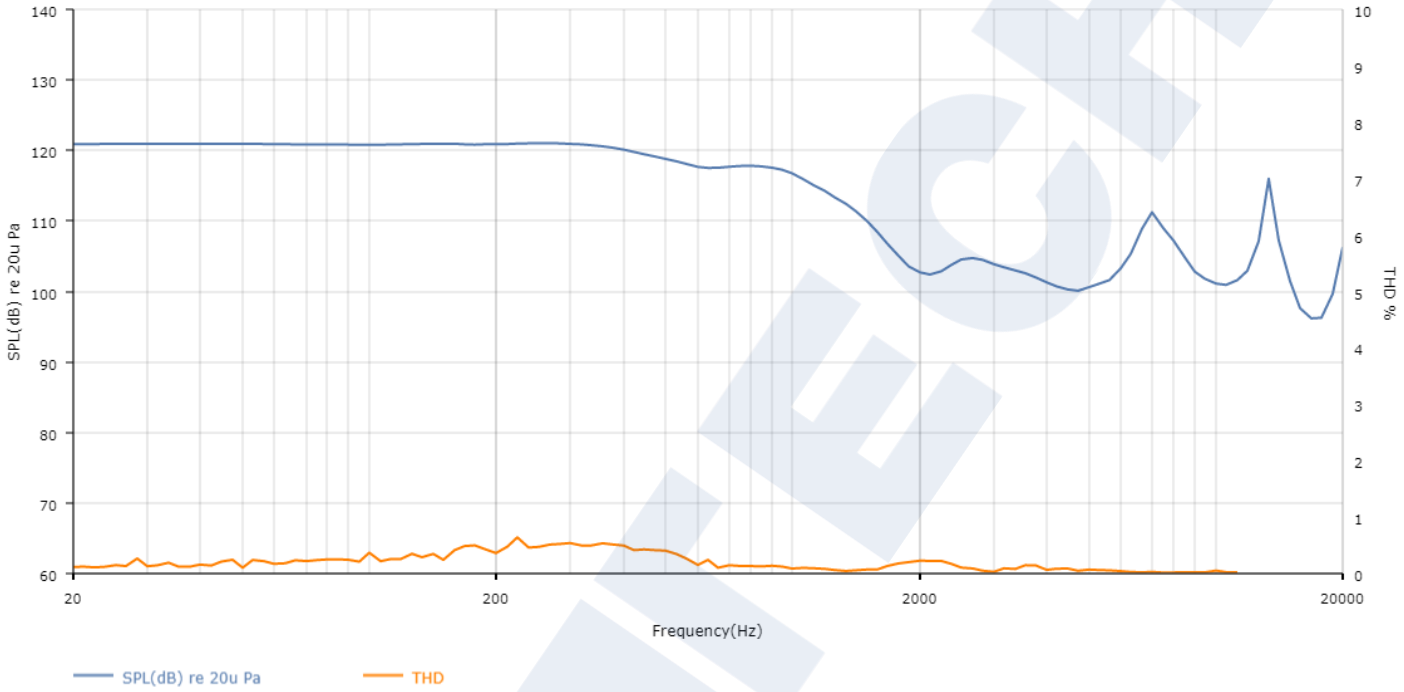

◆ Transducer front and side images:

