


◆ **Model No:** ASDFD0008-3201

- 40mm Transducer Frame.
- 16.5mm CCAW Voice Coil
- 19u PET

◆ **Transducer front and side images:**

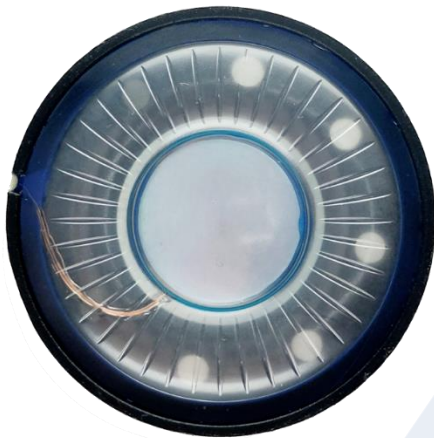

◆ **Specifications:**


**Features:**

Transducer	40CY
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 40mm PC
YOKE	Ø 23mm SPCC/CR3
Magnet	Ø 15.7mm NdFeB-N42
Washer (T-Plater)	Ø 15.8mm SPCC/CR3
PCB	Ø 39*0.3mm FR4
Diaphragm	Ø 38.75mm PEEK
Voice Coil	CCAW
Grill Cover	NON
Mesh	Non-Woven White

**Transducers Properties:**

Transducer	Ø 40mm
D.C.R.	32 ± 15%Ω
Sensitivity	124 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~10KHz) ≤ 3%
Rated Input Power	20mW
Max Input Power	30mW
Buzz and Rattles	Shall Be Rated Input Power 30mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

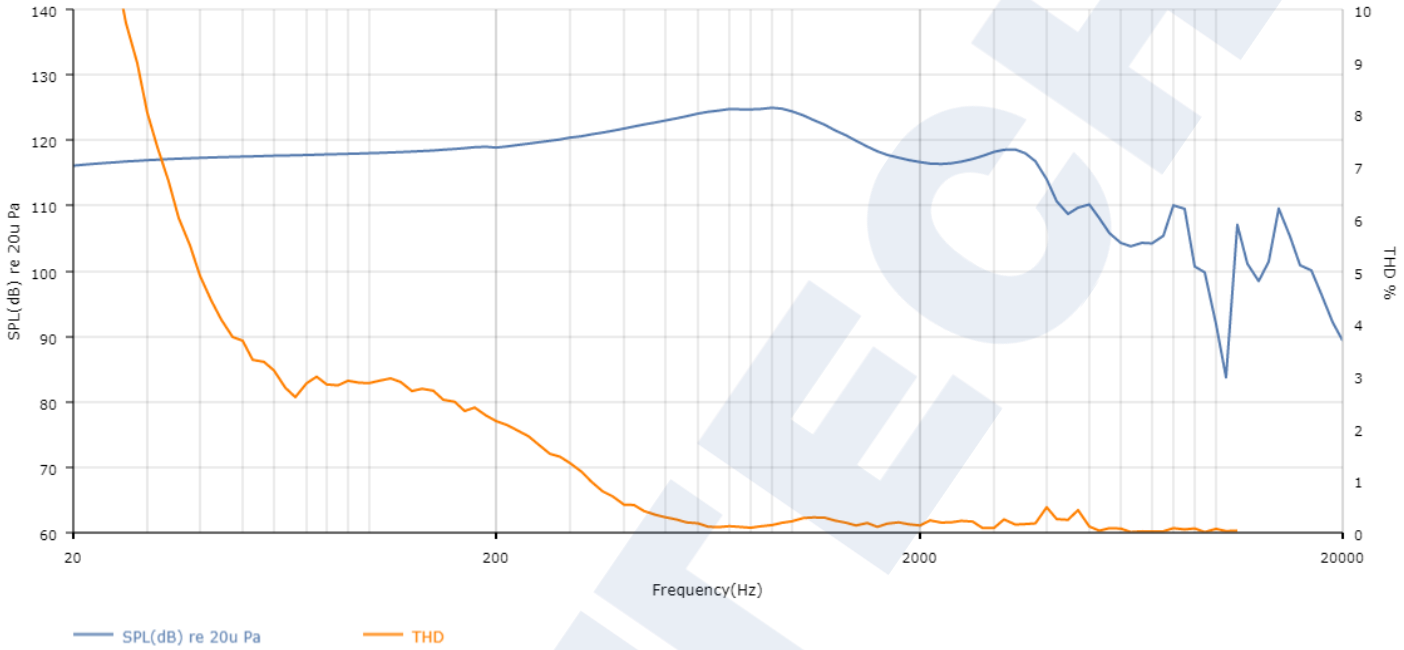

## ◆ Transducer front and side images:

