

◆ **Model No:** ASDFD0009-3201

- 14.28mm Transducer Frame.
- 7.1mm Voice Coil SDHT.
- 3.5μTpu+0.075White chemical fiber paper.

◆ **Transducer front and side images:**



◆ **Specifications:**


**Features:**

Transducer	14.28CY-32Ω
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 14.28mm PC
YOKE	Ø 9.0mm SPCC/CR3
Magnet	Ø 6.5mm NdFeB-N38
Washer (T-Plater)	Ø 6.6mm SPCC/CR3
PCB	SPCC injection molding machine
Diaphragm	Ø 14.28mm Tpu+AMZ+0.075u
Voice Coil	Ø 7.1mm SDHT
Grill Cover	NON
Mesh	Black Satti

**Transducers Properties:**

Transducer	Ø 14.28mm
D.C.R.	32 ± 15%Ω
Sensitivity	106 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (100~20KHz) ≤1%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

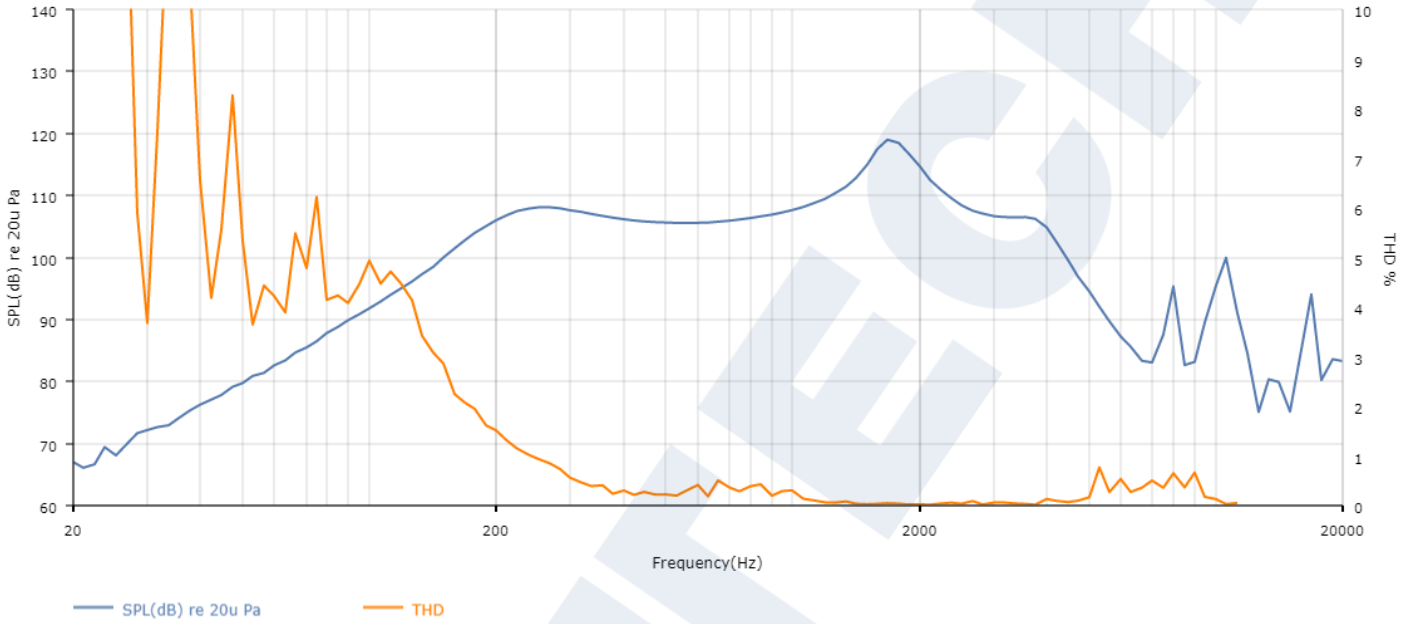

## ◆ Transducer front and side images:

