

- ◆ **Model No:** ASDFD000C-3202
 - 12mm Transducer Frame.
 - 6.6mm Voice Coil SDHT.
 - 4 μ TPU+16 μ PEN Nickel plating.
- ◆ **Transducer front and side images:**



◆ Specifications:


Features:

Transducer	12CY-32.0 Ω
Insert Molding	Molding PC
Injection Basket/Yoke	\varnothing 12mm PC
YOKE	\varnothing 8.4mm SPCC/CR3
Magnet	\varnothing 6.1mm NdFeB-N38
Washer (T-Plater)	\varnothing 6.2mm SPCC/CR3
PCB	SPCC injection molding machine
Diaphragm	\varnothing 12mm Tpu+PEN+16u
Voice Coil	\varnothing 6.6mm SDHT
Grill Cover	NON
Mesh	Black Satti

Transducers Properties:

Transducer	\varnothing 12mm
D.C.R.	32 \pm 15% Ω
Sensitivity	106 \pm 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (100~20KHz) \leq 1%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

◆ S. P. L Curve:

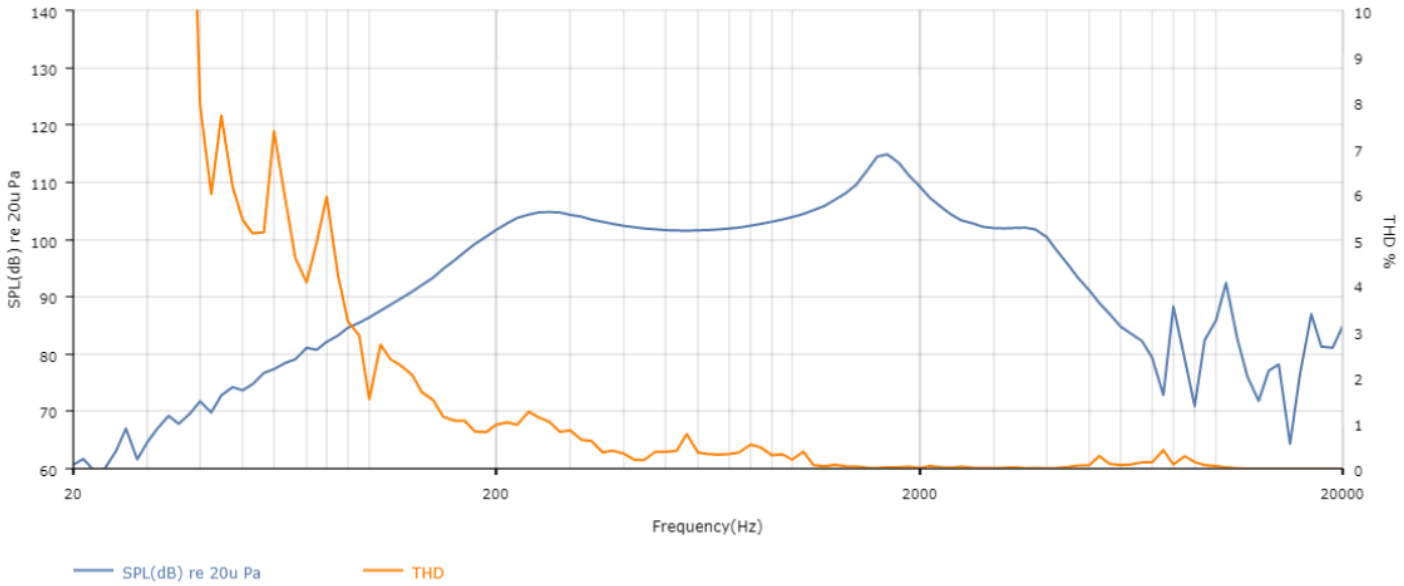

◆ Transducer front and side images:

