


1.75", Plastic Frame
0.8" CCAW Voice Coil, Kapton Former
Paper Cone, Rubber Surround
Dual Neodymium Magnet Motor System
Power Handling with 4th HP Filter @250Hz

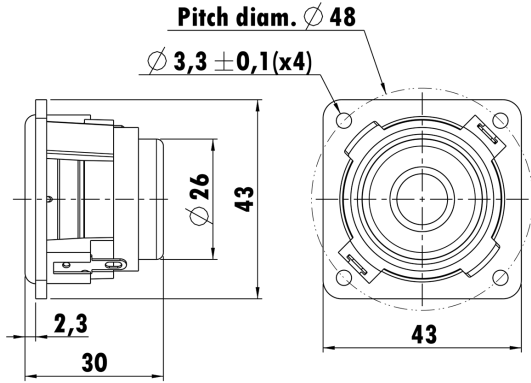

T-S Parameters

Resonance frequency [fs]	213.4 Hz
Mechanical Q factor [Qms]	9.153
Electrical Q factor [Qes]	0.491
Total Q factor [Qts]	0.466
Force factor [Bl]	3.25 Tm
Mechanical resistance [Rms]	0.163 kg/s
Moving mass [Mms]	1.116 g
Compliance [Cms]	0.499 mm/N
Effective diaph. diameter [D]	31.8 mm
Effective piston area [Sd]	7.94 cm ²
Equivalent volume [Vas]	0.0445 l
Sensitivity (2.83V/1m)	83 dB
Ratio Bl/√Re	1.745 N/√W
Ratio fs/Qts	457.94 Hz

Electrical Data

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.6 Ω
Maximum impedance [Zo]	43.2 Ω
DC resistance [Re]	3.47 Ω
Voice coil inductance [Le]	0.071 mH

Power Handling

100h RMS noise test (IEC 18.4)	5 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	19.4 mm
Voice coil height	6.1 mm
Voice coil layers	2
Height of gap	2.5 mm
Linear excursion	± 1.8 mm
Max mech. excursion	± - mm
Unit weight	0.057 kg

