


74mm x 44mm, Steel Frame
0.7" CCAW Voice Coil, Kapton Former
Paper cone, PU Surround
Ferrite With Neodymium Magnet Motor System
Low Distortion (<3%)

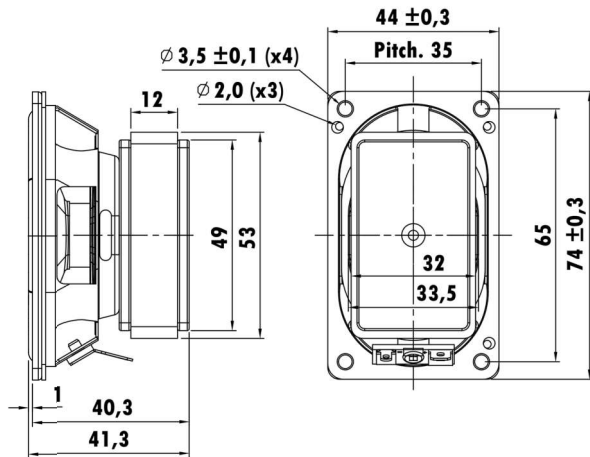

T-S Parameters

Resonance frequency [fs]	195.4 Hz
Mechanical Q factor [Qms]	4.133
Electrical Q factor [Qes]	1.302
Total Q factor [Qts]	0.990
Force factor [Bl]	2.8 Tm
Mechanical resistance [Rms]	0.442 kg/s
Moving mass [Mms]	1.486 g
Compliance [Cms]	0.446 mm/N
Effective diaph. diameter [D]	59x31 mm
Effective piston area [Sd]	17 cm ²
Equivalent volume [Vas]	0.165 l
Sensitivity (2.83V/1m)	83 dB
Ratio Bl/√Re	1.18 N/√W
Ratio fs/Qts	197.37 Hz

Electrical Data

Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	6.4 Ω
Maximum impedance [Zo]	21.15 Ω
DC resistance [Re]	5.59 Ω
Voice coil inductance [Le]	0.035 mH

Power Handling

100h RMS noise test (IEC 18.4)	25 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	16.3 mm
Voice coil height	6.8 mm
Voice coil layers	2
Height of gap	3 mm
Linear excursion	± 1.9 mm
Max mech. excursion	± mm
Unit weight	0.19 kg

