


2", Plastic Frame
1" PESVW Voice Coil, Aluminum Former
Paper Cone, Cloth Surround
Copper-shorting Ring
High Sensitivity

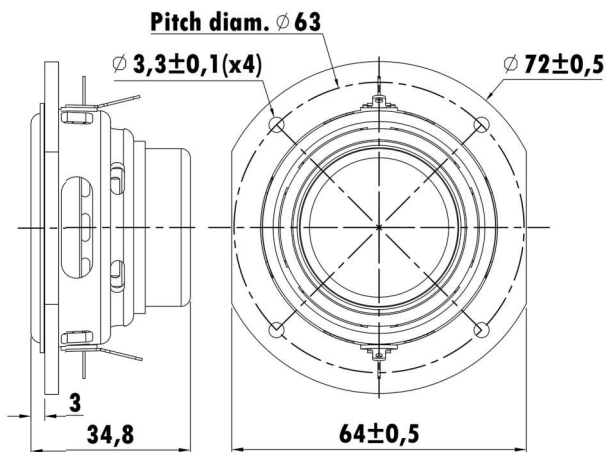

T-S Parameters

Resonance frequency [fs]	349 Hz
Mechanical Q factor [Qms]	5.03
Electrical Q factor [Qes]	1.23
Total Q factor [Qts]	0.99
Force factor [Bl]	4 Tm
Mechanical resistance [Rms]	0.73 kg/s
Moving mass [Mms]	1.69 g
Compliance [Cms]	0.12 mm/N
Effective diaph. diameter [D]	45 mm
Effective piston area [Sd]	15.9 cm ²
Equivalent volume [Vas]	0.04 l
Sensitivity (2.83V/1m)	86 dB
Ratio Bl/√Re	1.69 N/√W
Ratio fs/Qts	352 Hz

Electrical Data


Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	6.4 Ω
Maximum impedance [Zo]	22.7 Ω
DC resistance [Re]	5.6 Ω
Voice coil inductance [Le]	0.03 mH

Power Handling

100h RMS noise test (IEC 18.4)	10 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	25.4 mm
Voice coil height	5.2 mm
Voice coil layers	2
Height of gap	2.5 mm
Linear excursion	± 1.35 mm
Max mech. excursion	± - mm
Unit weight	0.112 kg

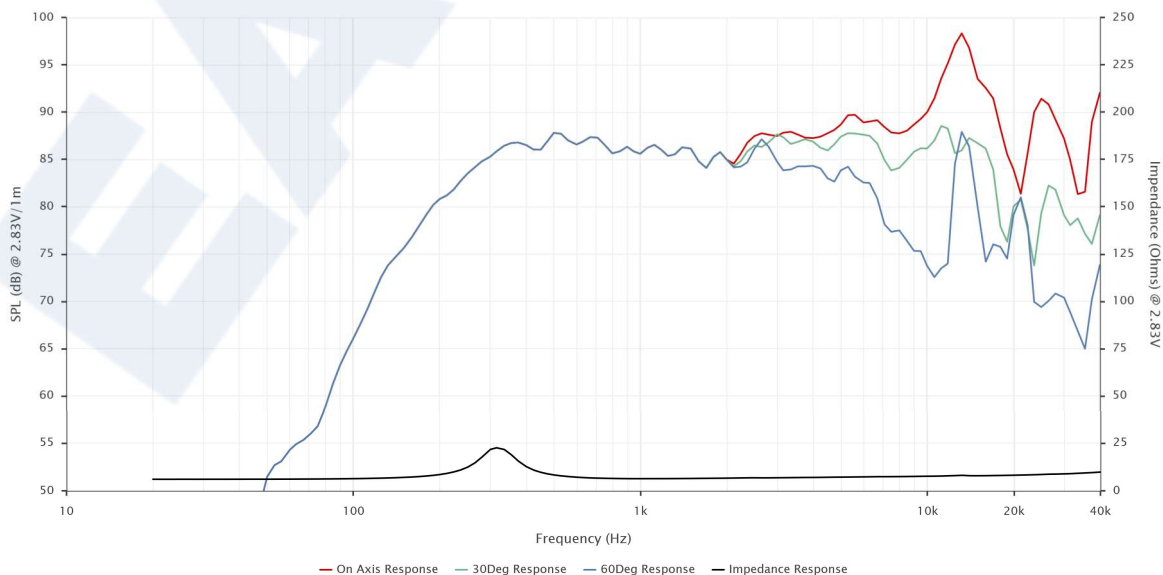

EASTTECH HOLDING LIMITED, CHN