


1.75", Steel Frame
0.8" CCAW Voice Coil, Aluminum Former
Mica Cone, Foamed Rubber Surround
Dual Neodymium Magnet Motor System

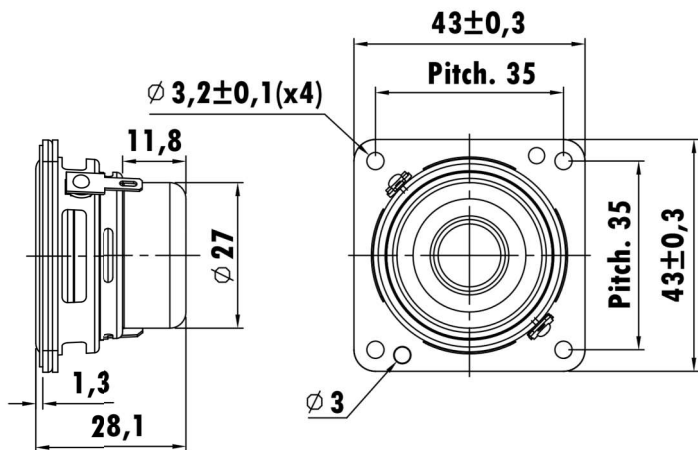

T-S Parameters

Resonance frequency [fs]	276.4 Hz
Mechanical Q factor [Qms]	4.70
Electrical Q factor [Qes]	1.00
Total Q factor [Qts]	0.83
Force factor [Bl]	2.83 Tm
Mechanical resistance [Rms]	0.44 kg/s
Moving mass [Mms]	1.19 g
Compliance [Cms]	0.28 mm/N
Effective diaph. diameter [D]	32.3 mm
Effective piston area [Sd]	8.19 cm ²
Equivalent volume [Vas]	0.0265 l
Sensitivity (2.83V/1m)	82 dB
Ratio Bl/√Re	1.45 N/√W
Ratio fs/Qts	333.01 Hz

Electrical Data


Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	4.6 Ω
Maximum impedance [Zo]	20.4 Ω
DC resistance [Re]	3.8 Ω
Voice coil inductance [Le]	0.088 mH

Power Handling

100h RMS noise test (IEC 18.4)	5 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	19.43 mm
Voice coil height	6.6 mm
Voice coil layers	2
Height of gap	3 mm
Linear excursion	± 1.8 mm
Max mech. excursion	± - mm
Unit weight	0.062 kg

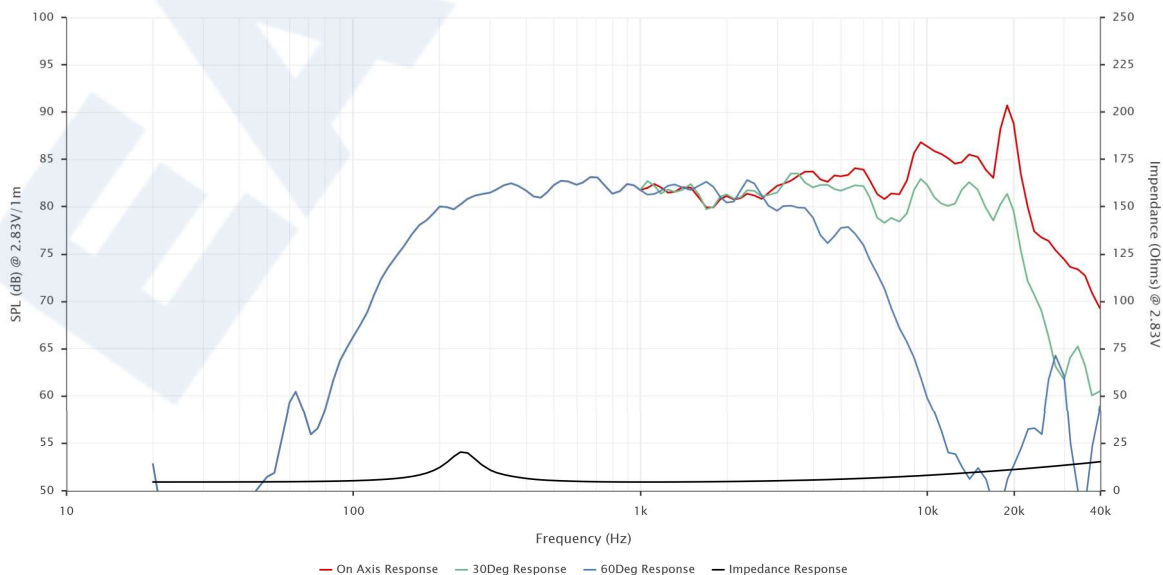

EASTTECH HOLDING LIMITED, CN