


◆ **Model No:** FSBB10015-0A11

- 14.2mm Transducer Frame.
- 7.4mm Voice Coil DCCA.
- 09μPEN Diaphragm.

◆ **Transducer front and side images:**

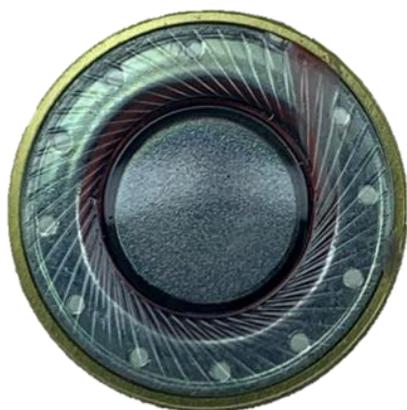

◆ **Specifications:**


Features:

Transducer	14.2CY-16.0Q-09C
Insert Molding	NON
Injection Basket/Yoke	NON
YOKE	Ø 14.12mmSPCC/CR3
Magnet	Ø 6.7mm NdFeB-N38
Washer (T-Plater)	Ø 6.7mm SPCC/CR3
PCB	Ø 7.5mm FR4
Diaphragm	Ø 14.05mmPEN
Voice Coil	Ø 7.4mmDCCA
Grill Cover	NON
Mesh	NON

Transducers Properties:

Transducer	Ø 14.2mm
D.C.R.	16 ± 15%Ω
Sensitivity	92 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) ≤5%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

◆ S. P. L Curve:

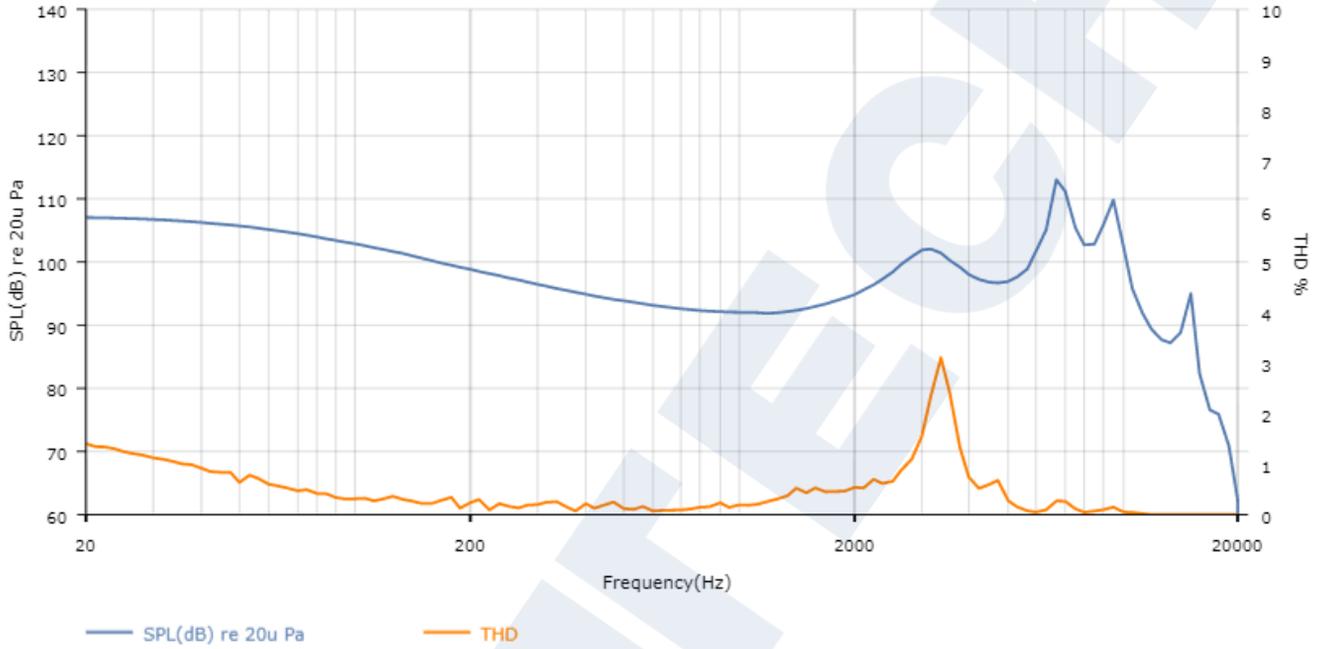

◆ Transducer front and side images:

