


85mm x 40mm, Steel Frame
0.6" EISVW Voice Coil, Aluminum Former
Paper Cone, Rubber Surround
Powerful Neodymium Ring Motor System
Bottom Plate Vent, Low Distortion(<3%)

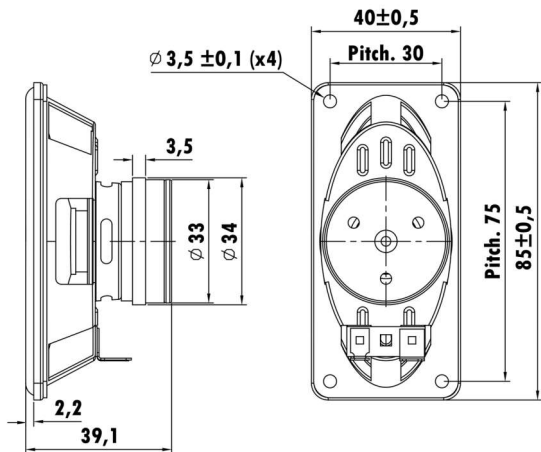

T-S Parameters

Resonance frequency [fs]	189.8 Hz
Mechanical Q factor [Qms]	4.72
Electrical Q factor [Qes]	1.71
Total Q factor [Qts]	1.25
Force factor [Bl]	3.24 Tm
Mechanical resistance [Rms]	0.69 kg/s
Moving mass [Mms]	2.75 g
Compliance [Cms]	0.26 mm/N
Effective diaph. diameter [D]	76 x 33 mm
Effective piston area [Sd]	19.45 cm ²
Equivalent volume [Vas]	0.1369 l
Sensitivity (2.83V/1m)	81 dB
Ratio Bl/√Re	1.37 N/√W
Ratio fs/Qts	151.84 Hz

Electrical Data


Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	6.2 Ω
Maximum impedance [Zo]	18.6 Ω
DC resistance [Re]	5.6 Ω
Voice coil inductance [Le]	0.19 mH

Power Handling

100h RMS noise test (IEC 18.4)	8 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	16.28 mm
Voice coil height	7.9 mm
Voice coil layers	2
Height of gap	4 mm
Linear excursion	± 1.95 mm
Max mech. excursion	± - mm
Unit weight	0.108 kg

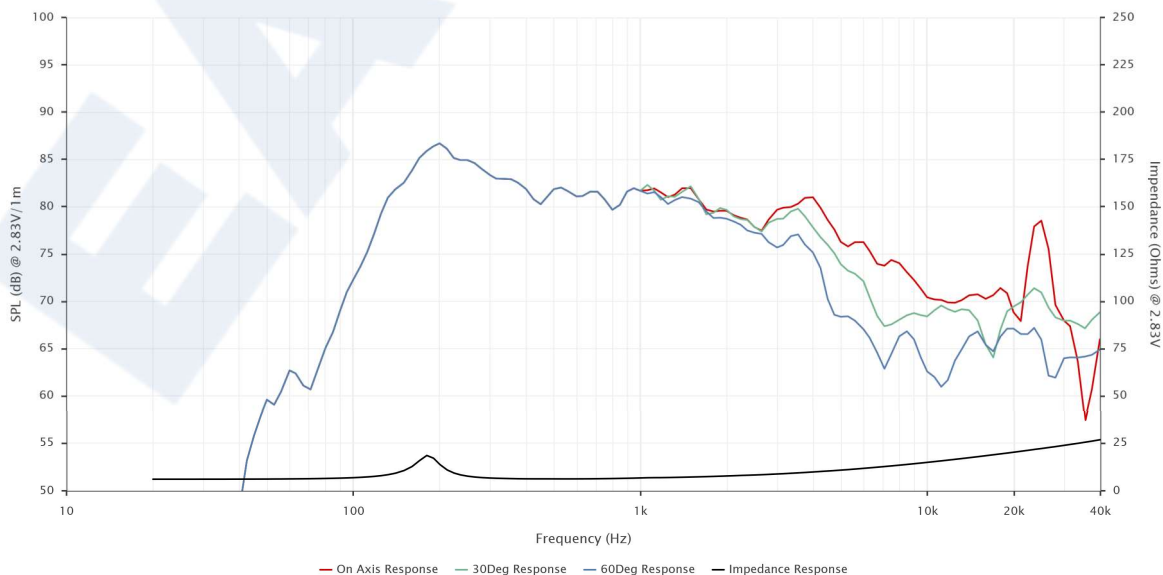

EASTTECH HOLDING LIMITED, CN