


10", Steel Frame
2.0" PEPSW Voice Coil, GFB-G Former
PP Cone, Rubber Surround
Ferrite Magnet Motor System

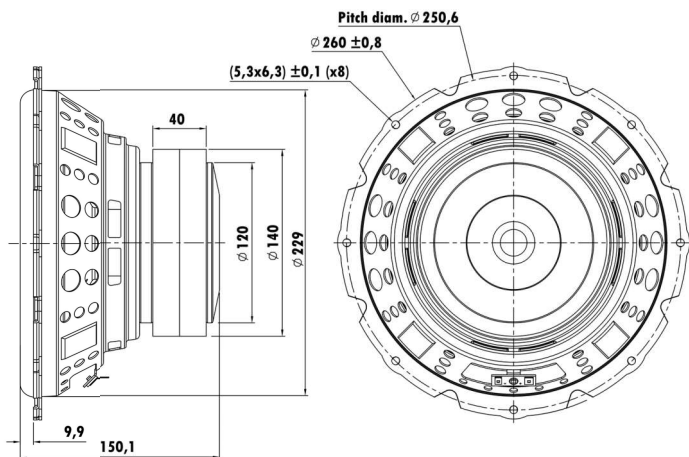

T-S Parameters

Resonance frequency [fs]	26.3 Hz
Mechanical Q factor [Qms]	12.3
Electrical Q factor [Qes]	0.31
Total Q factor [Qts]	0.31
Force factor [Bl]	14.48 Tm
Mechanical resistance [Rms]	1.88 kg/s
Moving mass [Mms]	140.6 g
Compliance [Cms]	0.26 mm/N
Effective diaph. diameter [D]	211.1 mm
Effective piston area [Sd]	350 cm ²
Equivalent volume [Vas]	45.01 l
Sensitivity (2.83V/1m)	87 dB
Ratio Bl/√Re	8.50 N/√W
Ratio fs/Qts	84.83 Hz

Electrical Data

Nominal impedance [Zn]	3 Ω
Minimum impedance [Zmin]	3.98 Ω
Maximum impedance [Zo]	85.5 Ω
DC resistance [Re]	2.9 Ω
Voice coil inductance [Le]	2.64 mH

Power Handling

100h RMS noise test (IEC 18.4)	400 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	49.55 mm
Voice coil height	28.8 mm
Voice coil layers	4
Height of gap	10 mm
Linear excursion	± 9.4 mm
Max mech. excursion	± - mm
Unit weight	5.06 kg

