


6.5", Steel Frame
1.2" PESVW Voice Coil, Aluminum Former
Paper Cone, Rubber Surround
Dual Ferrite Magnet Motor System

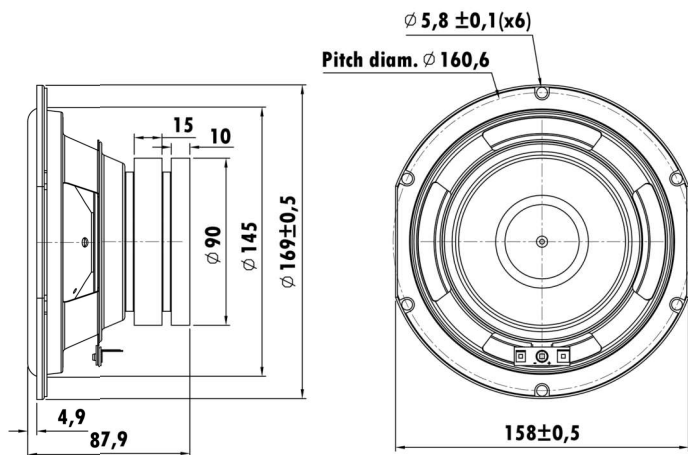

T-S Parameters

Resonance frequency [fs]	60.1 Hz
Mechanical Q factor [Qms]	5.84
Electrical Q factor [Qes]	0.81
Total Q factor [Qts]	0.71
Force factor [Bl]	7.4 Tm
Mechanical resistance [Rms]	2.21 kg/s
Moving mass [Mms]	34.06 g
Compliance [Cms]	0.21 mm/N
Effective diaph. diameter [D]	129.96 mm
Effective piston area [Sd]	131.92 cm ²
Equivalent volume [Vas]	5.063 l
Sensitivity (2.83V/1m)	89 dB
Ratio Bl/√Re	4.02 N/√W
Ratio fs/Qts	84.64 Hz

Electrical Data


Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	4.5 Ω
Maximum impedance [Zo]	29.1 Ω
DC resistance [Re]	3.4 Ω
Voice coil inductance [Le]	1.18 mH

Power Handling

100h RMS noise test (IEC 18.4)	30 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	29.55 mm
Voice coil height	10.1 mm
Voice coil layers	6
Height of gap	5 mm
Linear excursion	± 2.55 mm
Max mech. excursion	± - mm
Unit weight	1.196 kg

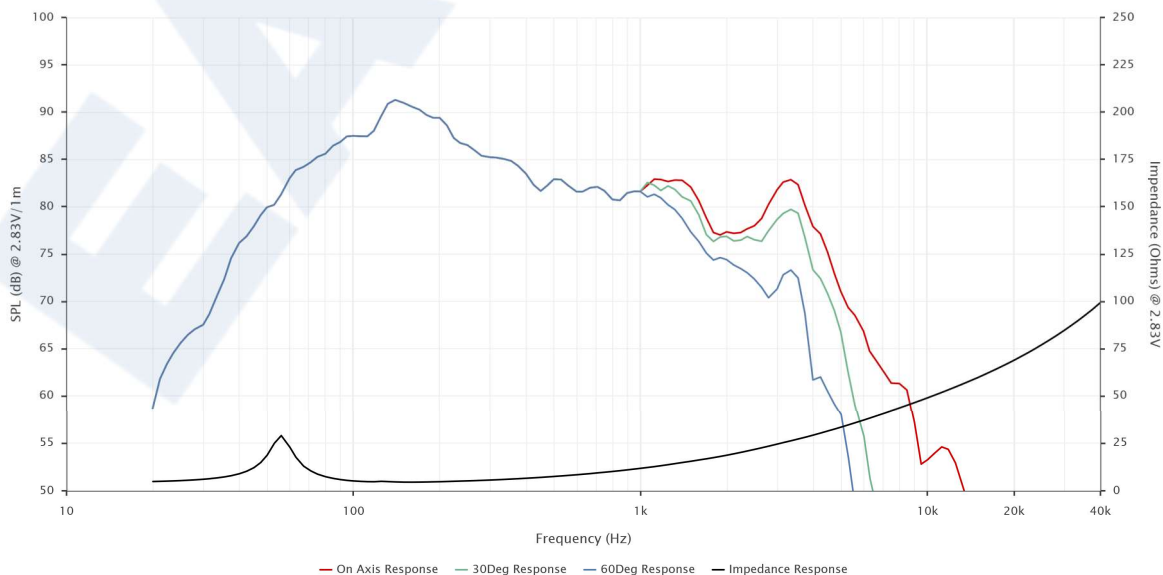

EASTTECH HOLDING LIMITED, CHN