


5.25", Steel Frame
1.2" PESVCCAW Voice Coil, GFB Former
Paper Cone, Rubber Surround
Ferrite Magnet Motor System
Long Excursion(>±10mm)

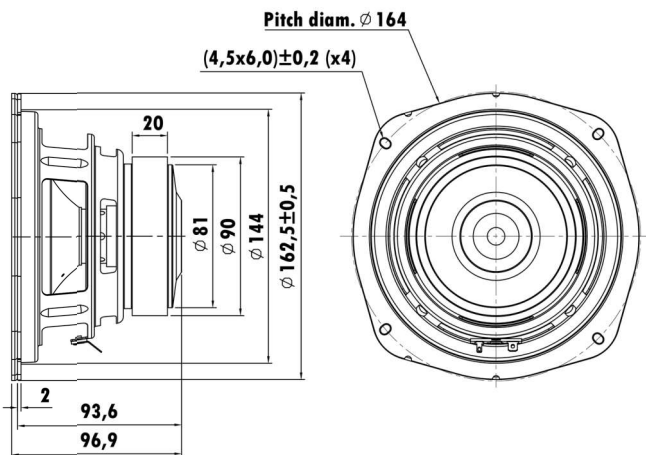

T-S Parameters

Resonance frequency [fs]	72.3 Hz
Mechanical Q factor [Qms]	10.69
Electrical Q factor [Qes]	1.03
Total Q factor [Qts]	0.939
Force factor [Bl]	6.5 Tm
Mechanical resistance [Rms]	1.19 kg/s
Moving mass [Mms]	28.03 g
Compliance [Cms]	0.173 mm/N
Effective diaph. diameter [D]	109.40 mm
Effective piston area [Sd]	94 cm ²
Equivalent volume [Vas]	2.16 l
Sensitivity (2.83V/1m)	86 dB
Ratio Bl/√Re	3.52 N/√W
Ratio fs/Qts	76.99 Hz

Electrical Data


Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	4.64 Ω
Maximum impedance [Zo]	49.8 Ω
DC resistance [Re]	3.4 Ω
Voice coil inductance [Le]	0.951 mH

Power Handling

100h RMS noise test (IEC 18.4)	100 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	30.5 mm
Voice coil height	22.2 mm
Voice coil layers	4
Height of gap	5 mm
Linear excursion	± 8.6 mm
Max mech. excursion	± - mm
Unit weight	1.23 kg

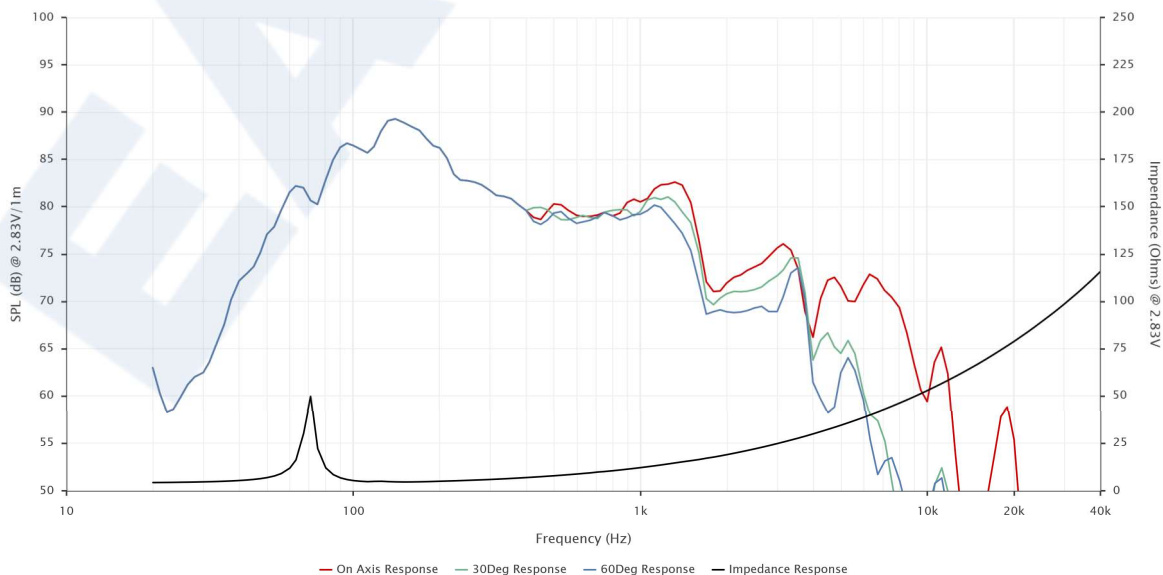

EASTTECH HOLDING LIMITED, CHN