


● *Tweeter model: ASDDL0510-0400*

This ultimate 0.8 inch, 4 ohm tweeter have been newly customized with 0.8 inch CCAW voice coil, Silk Dome Diaphragm with Neodymium motor system to provide great sound experience. This fine unit is the new benchmark for conference audio systems.

● *Transducer front and side images:*

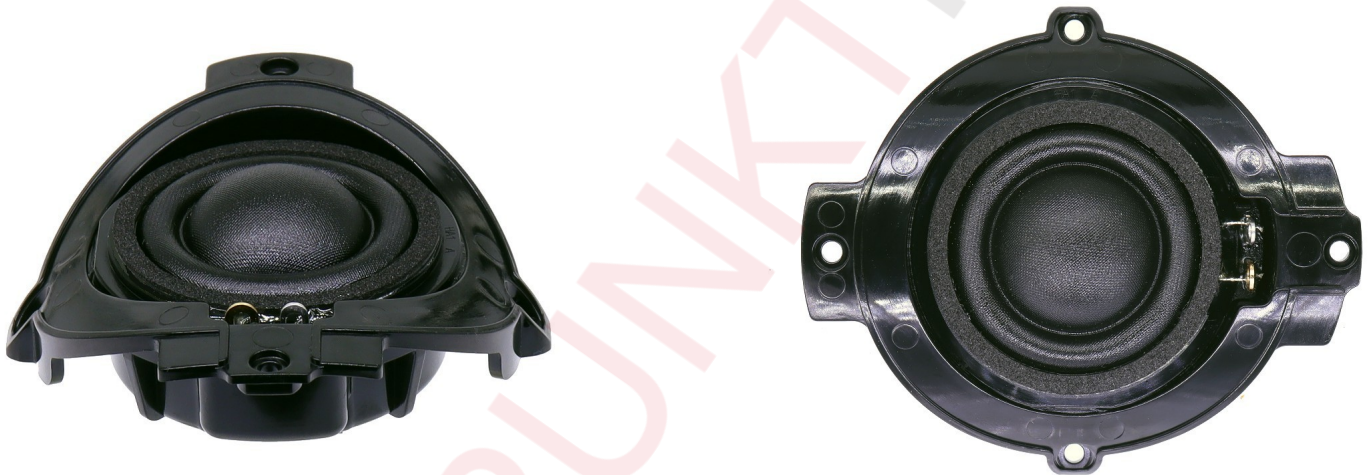

● *Specifications:*

T-S Parameters

Resonance frequency [fs]	839.2 Hz
Mechanical Q factor [Qms]	2.78
Electrical Q factor [Qes]	2.47
Total Q factor [Qts]	1.31
Force factor [Bl]	1.44 Tm
Mechanical resistance [Rms]	0.47 kg/s
Moving mass [Mms]	0.25 g
Compliance [Cms]	0.15 mm/N
Effective diaph. diameter [D]	24.10 mm
Effective piston area [Sd]	4.56 cm ²
Equivalent volume [Vas]	0.0013 l
Sensitivity (2.83V/1m)	87 dB
Ratio Bl/√Re	0.68 N/√W
Ratio fs/Qts	640 Hz

Electrical Data

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.74 Ω
Maximum impedance [Zo]	6.41 Ω
DC resistance [Re]	4.44 Ω
Voice coil inductance [Le]	0.02 mH


Power Handling

100h RMS noise test (IEC 18.4)	5 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	19.40 mm
Voice coil height	3.6 mm
Voice coil layers	2
Height of gap	2.5 mm
Linear excursion	± 0.55 mm
Max mech. excursion	± - mm
Unit weight	0.046 kg

● Frequency Response / Impedance Curve:

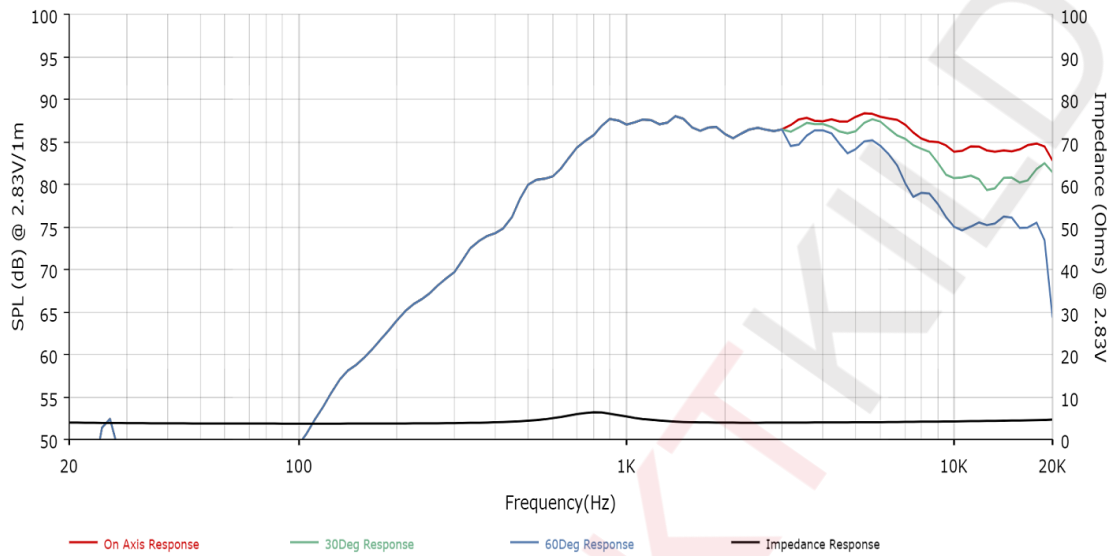

● Transducer front and side images:

