


1.5", Plastic Frame
1" CCAW Voice Coil, Aluminum Former
Paper Diaphragm, Aluminum Cap, Rubber Surround
Neodymium Magnet Motor System

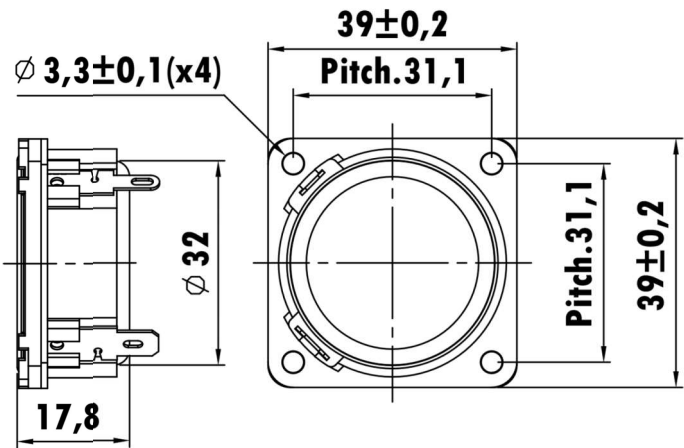

T-S Parameters

Resonance frequency [fs]	892.4 Hz
Mechanical Q factor [Qms]	4.62
Electrical Q factor [Qes]	2.28
Total Q factor [Qts]	1.53
Force factor [Bl]	2.99 Tm
Mechanical resistance [Rms]	0.76 kg/s
Moving mass [Mms]	0.63 g
Compliance [Cms]	0.05 mm/N
Effective diaph. diameter [D]	32.4 mm
Effective piston area [Sd]	8.24 cm²
Equivalent volume [Vas]	0.0043 l
Sensitivity (2.83V/1m)	87 dB
Ratio Bl/√Re	1.27 N/√W
Ratio fs/Qts	583.2 Hz

Electrical Data

Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	6.4 Ω
Maximum impedance [Zo]	14.4 Ω
DC resistance [Re]	5.6 Ω
Voice coil inductance [Le]	0.05 mH

Power Handling

100h RMS noise test (IEC 18.4)	5 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	25.5 mm
Voice coil height	2.9 mm
Voice coil layers	2
Height of gap	2 mm
Linear excursion	± 0.45 mm
Max mech. excursion	± - mm
Unit weight	0.055 kg

