


0.6", Plastic Frame
0.6" PESVCCAW Voice Coil, Kapton Former
Textile Diaphragm
Neodymium Magnet Motor System
Frequency Response > 30KHz

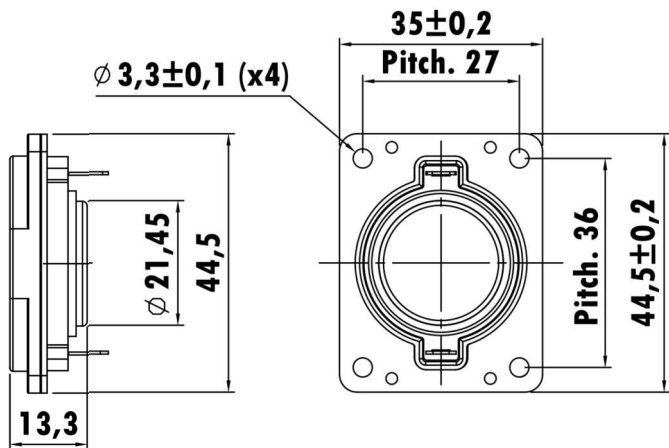

T-S Parameters

Resonance frequency [fs]	1966 Hz
Mechanical Q factor [Qms]	1.78
Electrical Q factor [Qes]	5.81
Total Q factor [Qts]	1.36
Force factor [Bl]	1.1 Tm
Mechanical resistance [Rms]	0.57 kg/s
Moving mass [Mms]	0.082 g
Compliance [Cms]	0.08 mm/N
Effective diaph. diameter [D]	20 mm
Effective piston area [Sd]	3.14 cm ²
Equivalent volume [Vas]	0.0011 l
Sensitivity (2.83V/1m)	90 dB
Ratio Bl/√Re	0.42 N/√W
Ratio fs/Qts	1446 Hz

Electrical Data

Nominal impedance [Zn]	8 Ω
Minimum impedance [Zmin]	6.9 Ω
Maximum impedance [Zo]	10.5 Ω
DC resistance [Re]	6.9 Ω
Voice coil inductance [Le]	0.028 mH

Power Handling

100h RMS noise test (IEC 18.4)	15 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	16.28 mm
Voice coil height	1.34 mm
Voice coil layers	2
Height of gap	1.5 mm
Linear excursion	± 0.08 mm
Max mech. excursion	± - mm
Unit weight	0.023 kg

