


2.75", Steel Frame
0.8" CCAW Voice Coil, Kapton Former
Paper Cone, Rubber Surround
Ferrite and Neodymium Magnet, Dual Magnet Motor System

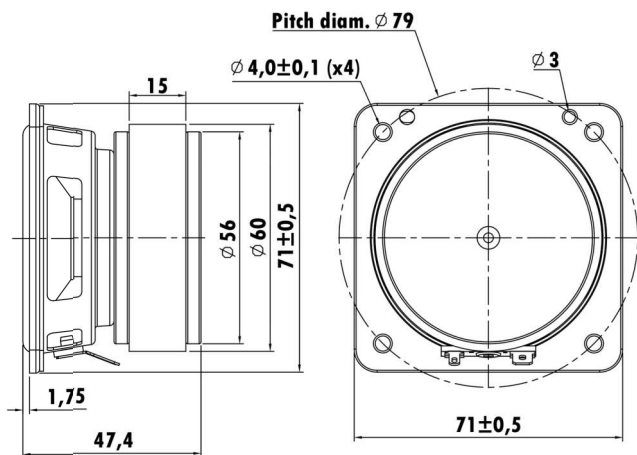

T-S Parameters

Resonance frequency [fs]	180 Hz
Mechanical Q factor [Qms]	4.6
Electrical Q factor [Qes]	0.54
Total Q factor [Qts]	0.48
Force factor [Bl]	4.7 Tm
Mechanical resistance [Rms]	0.49 kg/s
Moving mass [Mms]	2.0 g
Compliance [Cms]	0.38 mm/N
Effective diaph. diameter [D]	54.4 mm
Effective piston area [Sd]	23.2 cm ²
Equivalent volume [Vas]	0.29 l
Sensitivity (2.83V/1m)	86 dB
Ratio Bl/√Re	2.0 N/√W
Ratio fs/Qts	375 Hz

Electrical Data

Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	6.08 Ω
Maximum impedance [Zo]	30.74 Ω
DC resistance [Re]	5.4 Ω
Voice coil inductance [Le]	0.165 mH

Power Handling

100h RMS noise test (IEC 18.4)	30 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	20.32 mm
Voice coil height	6.3 mm
Voice coil layers	2
Height of gap	4 mm
Linear excursion	± 1.15 mm
Max mech. excursion	± - mm
Unit weight	0.4 kg

