


3", Steel Frame
0.8" PESVW Voice Coil, Aluminum Former
Paper Cone, Rubber Surround
Dual Neodymium Magnet Motor System

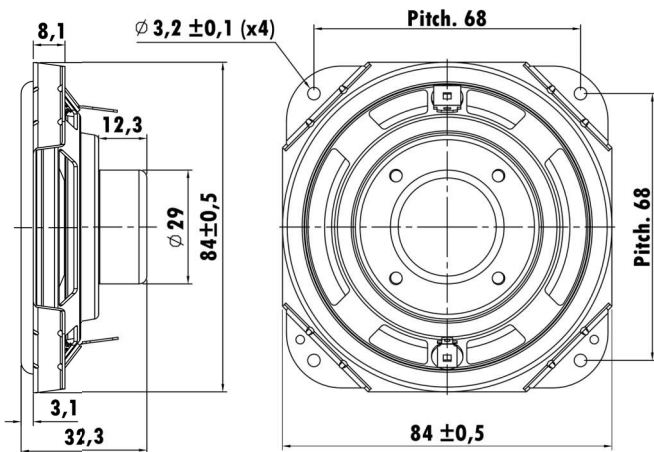

T-S Parameters

Resonance frequency [fs]	125.8 Hz
Mechanical Q factor [Qms]	4.787
Electrical Q factor [Qes]	0.535
Total Q factor [Qts]	0.48
Force factor [Bl]	6.148 Tm
Mechanical resistance [Rms]	0.830 kg/s
Moving mass [Mms]	5.030 g
Compliance [Cms]	0.318 mm/N
Effective diaph. diameter [D]	68 mm
Effective piston area [Sd]	36.32 cm ²
Equivalent volume [Vas]	0.5941 l
Sensitivity (2.83V/1m)	87 dB
Ratio Bl/√Re	2.725 N/√W
Ratio fs/Qts	262.083 Hz

Electrical Data


Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	5.795 Ω
Maximum impedance [Zo]	41.972 Ω
DC resistance [Re]	5.09 Ω
Voice coil inductance [Le]	0.362 mH

Power Handling

100h RMS noise test (IEC 18.4)	15 W
Long-term max power (IEC 18.2)	30 W

Voice Coil & Magnet Data

Voice coil diameter	20.32 mm
Voice coil height	6.2 mm
Voice coil layers	4
Height of gap	3 mm
Linear excursion	± 1.6 mm
Max mech. excursion	± - mm
Unit weight	0.0885 kg

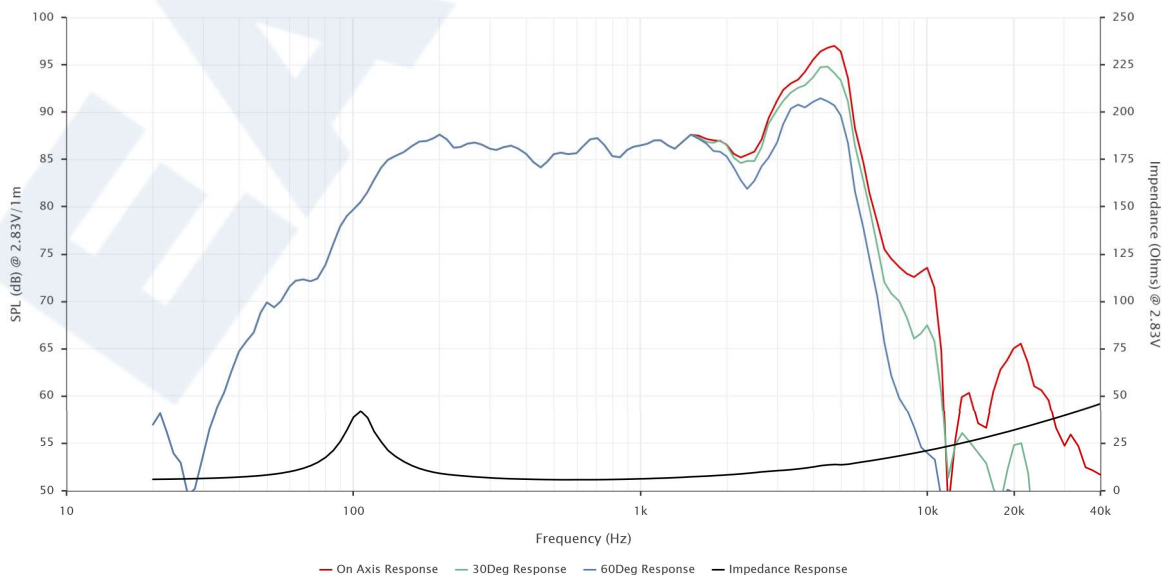

EASTTECH HOLDING LIMITED, CHN