


7", Steel Frame
1.2" EISVW Voice Coil, Aluminum Former
Paper Cone, Red Foam Surround
Dual Ferrite Magnet Motor System

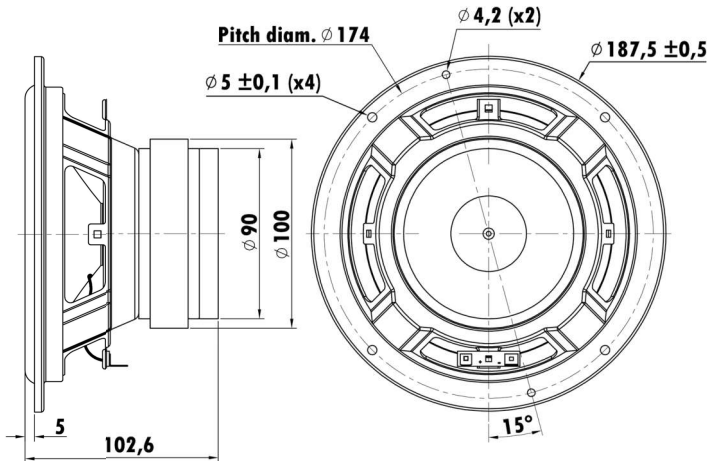

T-S Parameters

Resonance frequency [fs]	72 Hz
Mechanical Q factor [Qms]	5.931
Electrical Q factor [Qes]	0.542
Total Q factor [Qts]	0.497
Force factor [Bl]	8.731 Tm
Mechanical resistance [Rms]	1.971 kg/s
Moving mass [Mms]	25.655 g
Compliance [Cms]	0.188 mm/N
Effective diaph. diameter [D]	143 mm
Effective piston area [Sd]	160.60 cm ²
Equivalent volume [Vas]	6.855 l
Sensitivity (2.83V/1m)	90 dB
Ratio Bl/√Re	4.64 N/√W
Ratio fs/Qts	144.87 Hz

Electrical Data

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.94 Ω
Maximum impedance [Zo]	27.5 Ω
DC resistance [Re]	3.54 Ω
Voice coil inductance [Le]	0.591 mH

Power Handling

100h RMS noise test (IEC 18.4)	30 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	30.5 mm
Voice coil height	10 mm
Voice coil layers	4
Height of gap	6 mm
Linear excursion	± 2 mm
Max mech. excursion	± - mm
Unit weight	1.698 kg

