

- ◆ **Model No:** ASDFD0001-3200
 - 40mm coaxial dichotomy Frame.
 - 22.1mm+ 7.6mm Voice Coil .
 - 20 μ PU + 12uPEN Diaphragm.

◆ **Transducer front and side images:**



◆ **Specifications:**


Features:

Transducer	40CY-16 Ω
Insert Molding	Molding ABS757
Injection Basket/Yoke	\varnothing 40mm ABS757
YOKE	\varnothing 25.0mmSPCC/CR3
Magnet	\varnothing 21.3mmNdFeB-N45
Washer (T-Plater)	\varnothing 21.5mm SPCC/CR3
PCB	\varnothing 27.1*18.3mm FR4
Diaphragm	20 μ PU + 12uPEN
Voice Coil	\varnothing 22.1mm+7.6mm SDHT
Grill Cover	NON
Mesh	NON

Transducers Properties:

Transducer	\varnothing 40mm
D.C.R.	16 \pm 15% Ω
Sensitivity	119.0 \pm 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) \leq 5%
Rated Input Power	20mW
Max Input Power	30mW
Buzz and Rattles	Shall Be Rated Input Power 20mW Program Source Or Sine Wave

◆ S. P. L Curve:

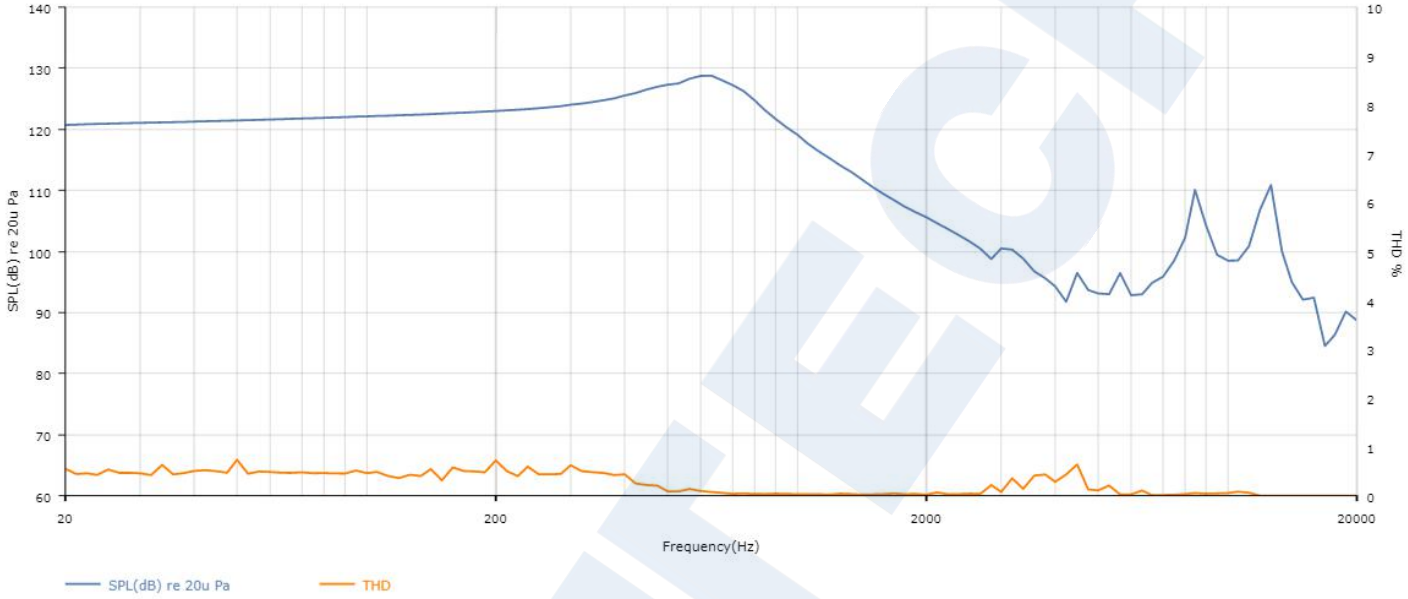

◆ Transducer front and side images:

