

## ◆ *Model No:ASDFD000E-2400*

- 16.2mm Transducer Frame.
- 7.4mm Voice Coil DHT.
- 3.5 $\mu$ TPU+0.1AZM.

## ◆ *Transducer front and side images:*



## ◆ *Specifications:*


### *Features:*

Transducer	16.2CY-24.0 $\Omega$
Insert Molding	Molding PC
Injection Basket/Yoke	$\varnothing$ 16.2mm
YOKE	$\varnothing$ 6.8mm SPCC/CR3
Magnet	$\varnothing$ 6.7mm NdFeB-N42
Washer (T-Plater)	$\varnothing$ 9.15mm SPCC/CR3
PCB	$\varnothing$ 4.4*2.0mm FR4
Diaphragm	$\varnothing$ 16.2mm 3.5 $\mu$ TPU+0.1AZM
Voice Coil	$\varnothing$ 7.4mm DHT
Grill Cover	NON
Mesh	NON

### *Transducers Properties:*

Transducer	$\varnothing$ 16.2mm
D.C.R.	24 $\pm$ 15% $\Omega$
Sensitivity	118 $\pm$ 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (100~6KHz) $\leq$ 5%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

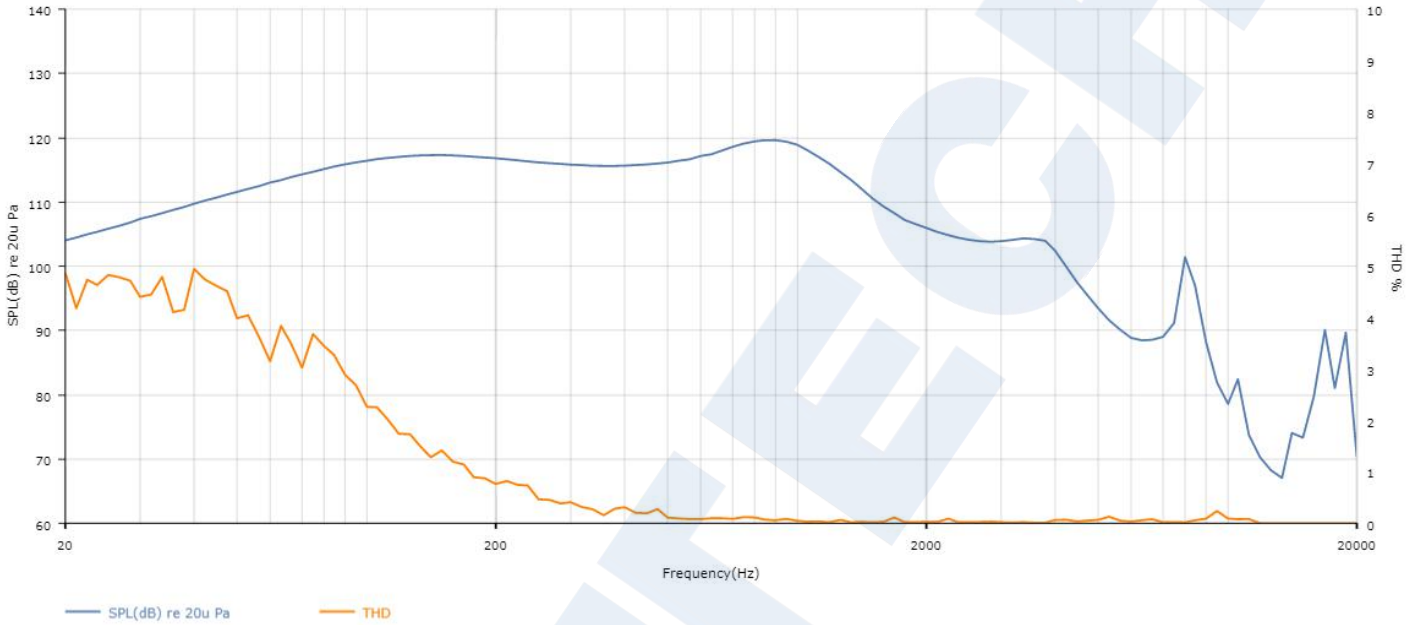

## ◆ Transducer front and side images:

