

◆ **Model No:** FSBB10010-0A32

- 10mm Transducer Frame.
- 4.3mm Voice Coil DCCA.
- 9 $\mu$ (MX) Diaphragm.

◆ **Transducer front and side images:**



◆ **Specifications:**


**Features:**

Transducer	10CY-16.0Q-09C
Insert Molding	NON
Injection Basket/Yoke	NON
YOKE	Ø 10.1mm SPCC/CR3
Magnet	Ø 3.5mm NdFeB-N35
Washer (T-Plater)	Ø 4.0mm SPCC/CR3
PCB	Ø 5mm FR4
Diaphragm	Ø 9.5MX
Voice Coil	Ø 4.3mm DCCA
Grill Cover	Ø 9.5mm SUS
Mesh	NBC 6*1.5(内孔1.2*0.65) /8.9*8.0/3M9448

**Transducers Properties:**

Transducer	Ø 10mm
D.C.R.	16 ± 15%Ω
Sensitivity	92 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) ≤ 5%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

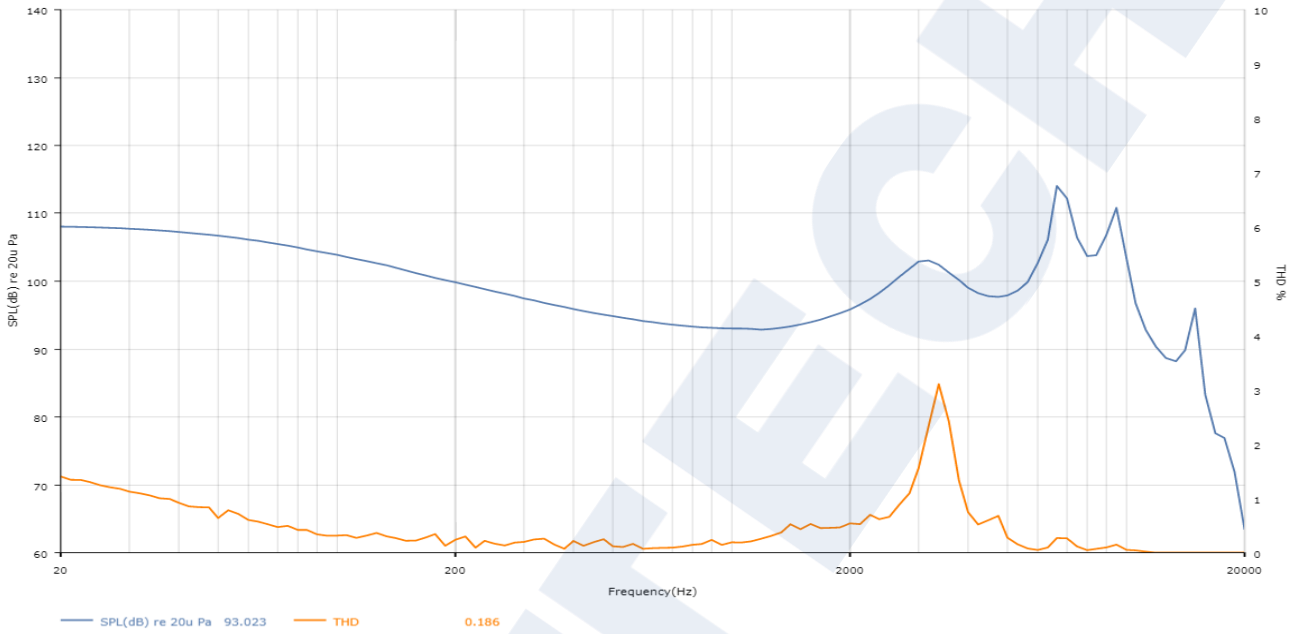

## ◆ Transducer front and side images:

