


◆ **Model No:** FSBB10013-0A01

- 13.6mm Transducer.
- 7.3mm Voice Coil DCCA.
- PU+PET Diaphragm.

◆ **Transducer front and side images:**

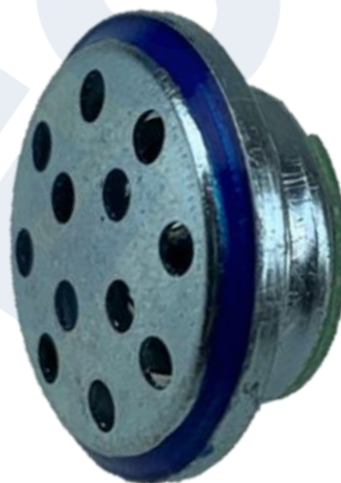

◆ **Specifications:**


**Features:**

Transducer	13.6CY-16.0Q-09C
Insert Molding	NON
Injection Basket/Yoke	NON
YOKE	Ø 10.1mmSPCC/CR3
Magnet	Ø 6.5mmNdFeB-N35
Washer (T-Plater)	Ø 6.6mm SPCC/CR3
PCB	Ø 9.5mm FR4
Diaphragm	Ø 12.93mm (MX)
Voice Coil	Ø 7.3mm DCCA
Grill Cover	Ø 9.5mm SUS
Mesh	Ø12.75*Ø9.55/White-3M9448A

**Transducers Properties:**

Transducer	Ø 13.6mm
D.C.R.	32±15%Ω
Sensitivity	101±3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) ≤3%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

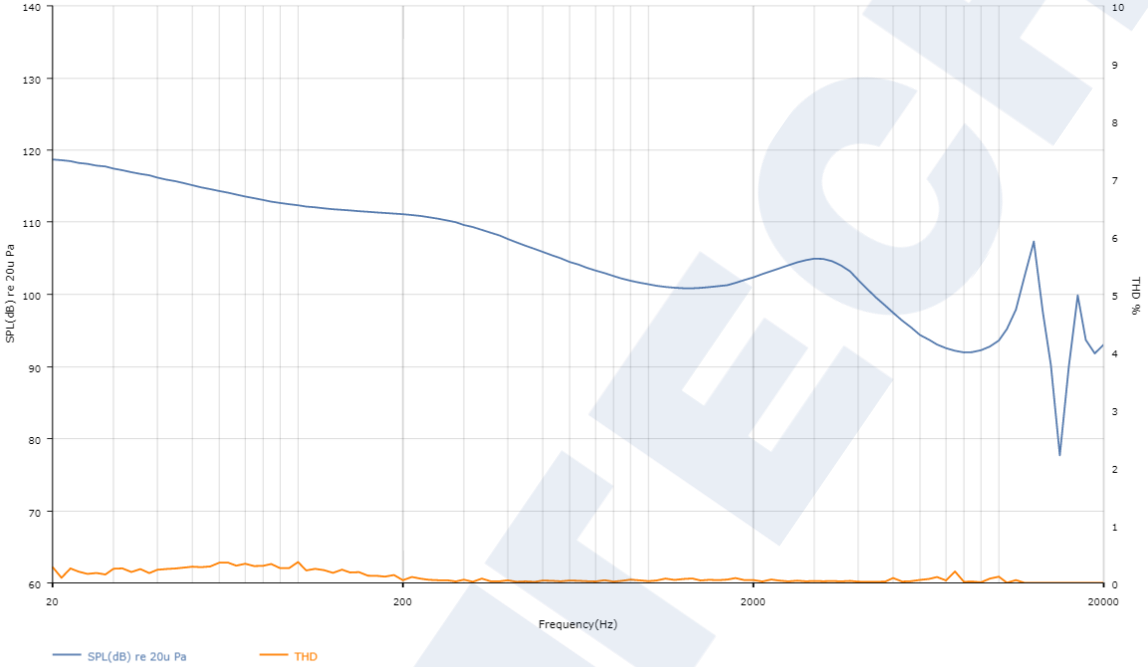

## ◆ Transducer front and side images:

