

◆ **Model No.** FSBB10040-0B06

- 40mm Transducer Frame.
- \varnothing 13.6mmDCCA.
- \varnothing 37.75mmPET.

◆ **Transducer front and side images:**



◆ **Specifications:**


Features:

Transducer	40CY-23.0 Ω -19C-PET
Insert Molding	Molding ABS757
Injection Basket/Yoke	\varnothing 40mm ABS757
YOKE	\varnothing 18mm SPCC/CR3
Magnet	\varnothing 12.5mm NdFeB-N42
Washer (T-Plater)	\varnothing 12.9mm SPCC/CR3
PCB	13x3.8mm FR4
Diaphragm	\varnothing 37.75mmPET
Voice Coil	\varnothing 13.6mmDCCA
Grill Cover	NON
Mesh	Non-WovenY2White

Transducers Properties:

Transducer	\varnothing 40mm
D.C.R.	23 \pm 15% Ω
Sensitivity	108 \pm 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) \leq 5%
Rated Input Power	20mW
Max Input Power	30mW
Buzz and Rattles	Shall Be Rated Input Power 20mW Program Source Or Sine Wave

◆ *S. P. L Curve:*

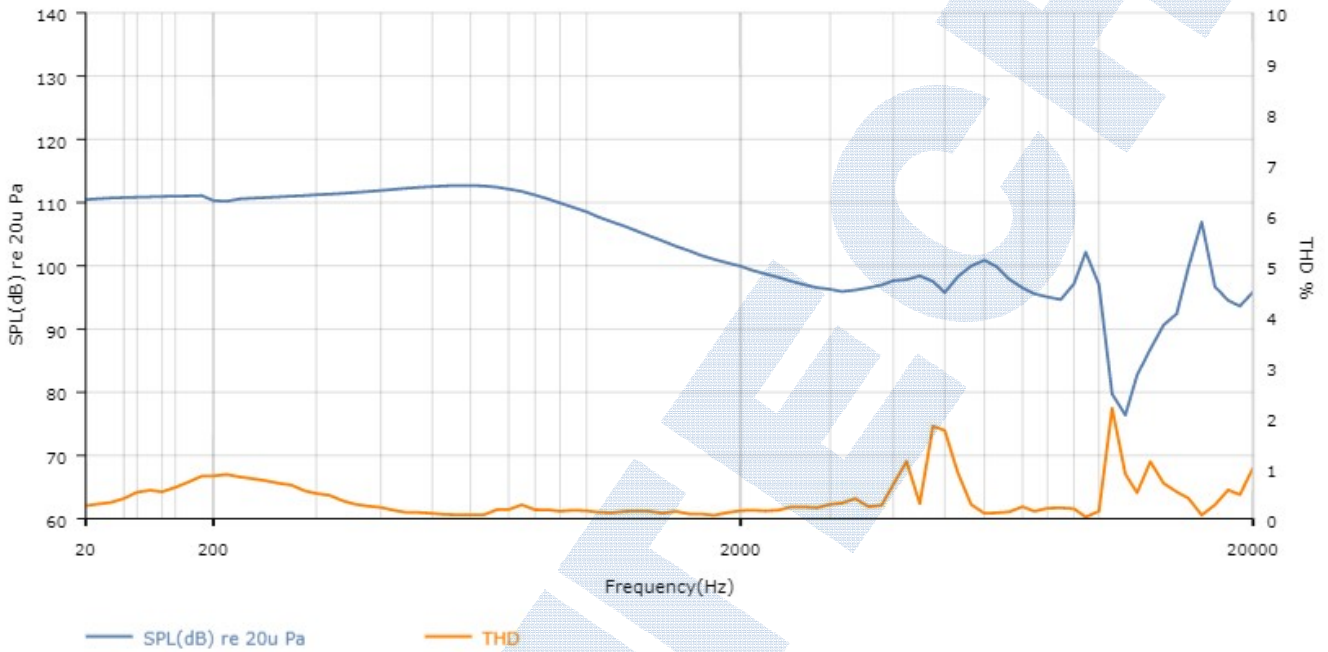

◆ *Transducer front and side images:*

