

● *Tweeter model: AUGDL2048-JN01*

This compact 8 ohm dome tweeter have been newly designed with 0.8 inch EISVCCAW voice coil, upgraded Textile dome diaphragm and Neodymium ferro fluid magnet motor system to provide excellent sound experience. This splendid unit is the new benchmark for bookshelf driver.

● *Transducer front and side images:*



● *Specifications:*

T-S Parameters

Resonance frequency [fs]	1135.4 Hz
Mechanical Q factor [Qms]	1.25
Electrical Q factor [Qes]	2.19
Total Q factor [Qts]	0.79
Force factor [Bl]	1.87 Tm
Mechanical resistance [Rms]	0.89 kg/s
Moving mass [Mms]	0.15 g
Compliance [Cms]	0.12 mm/N
Effective diaph. diameter [D]	24.3 mm
Effective piston area [Sd]	4.63 cm ²
Equivalent volume [Vas]	0.0038 l
Sensitivity (2.83V/1m)	87 dB
Ratio Bl/√Re	0.71 N/√W
Ratio fs/Qts	1437.2 Hz

Electrical Data

Nominal impedance [Zn]	8 Ω
Minimum impedance [Zmin]	5.7 Ω
Maximum impedance [Zo]	11.7 Ω
DC resistance [Re]	6.8 Ω
Voice coil inductance [Le]	0.016 mH


Power Handling

100h RMS noise test (IEC 18.4)	5 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	19.4 mm
Voice coil height	1.8 mm
Voice coil layers	2
Height of gap	2 mm
Linear excursion	± 0.1 mm
Max mech. excursion	± - mm
Unit weight	0.0488 kg

● Frequency Response / Impedance Curve:

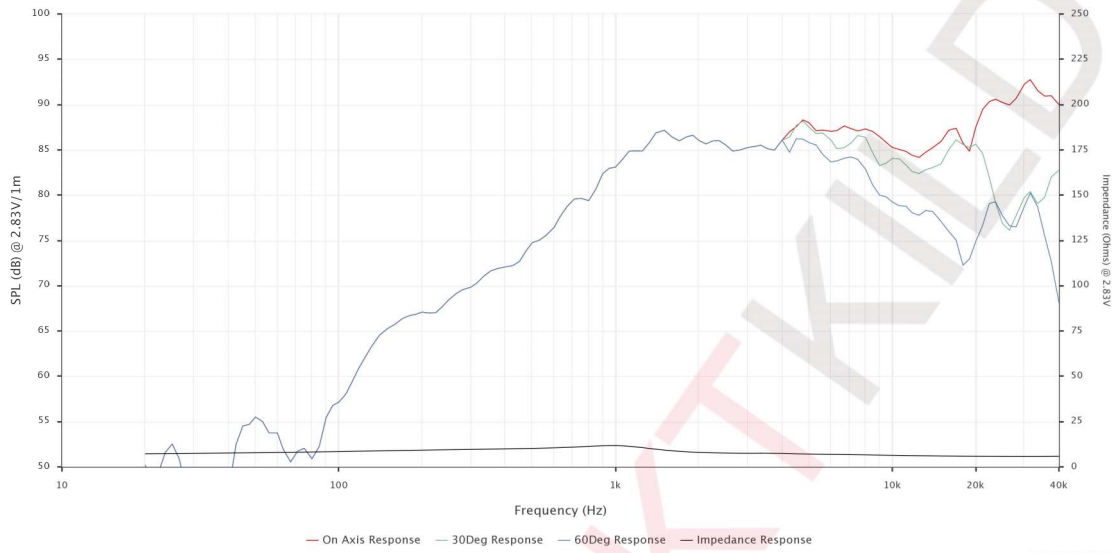

● Transducer front and side images:

